

### Power Output Ratings

50 Hz / 400 V

|                     |     |     |
|---------------------|-----|-----|
| Standby Power (ESP) | kVA | 232 |
|                     | kW  | 185 |
| Prime Power (PRP)   | kVA | 206 |
|                     | kW  | 165 |

### Engine

|                                |        |                              |
|--------------------------------|--------|------------------------------|
| Manufacturer                   |        | DOOSAN                       |
| Origin                         |        | KOREA                        |
| Model                          |        | P086TI                       |
| No of Cylinder / Configuration |        | 6 - INLINE                   |
| Displacement                   | lt     | 8,1                          |
| Bore / Stroke                  | mm     | 111 / 139                    |
| Compression Ratio              |        | 16,4:1                       |
| Aspiration                     |        | Turbocharged and Intercooled |
| Governor Type                  |        | ELECTRONIC                   |
| Cooling System                 |        | WATER                        |
| Coolant Capacity               | lt     | 48,5                         |
| Lubrication Oil Capacity       | lt     | 15,5                         |
| Electrical System              | VDC    | 24                           |
| Speed / Frequency              |        | 1500 rpm / 50 Hz             |
| Engine Gross Power             | kWm    | 199                          |
| Fuel Consumption               | lt/h   | 110 %                        |
|                                |        | 100 %                        |
|                                |        | 75 %                         |
|                                |        | 50 %                         |
| Exhaust Outlet Temperature     | °C     | 580                          |
| Exhaust Gas Flow               | m³/min | 33,9                         |
| Combustion Air Flow            | m³/min | 12,1                         |
| Cooling Air Flow               | m³/min | 250                          |

### Alternator

|                                    |     |  |
|------------------------------------|-----|--|
| Manufacturer                       |     | MARELLI                                      |
| Origin                             |     | ITALY  |
| Model                              |     | MJB250LA4                                    |
| No of Phase                        |     | 3  |
| Power Factor                       |     | 0,8  |
| No of Bearing                      |     | SINGLE                                       |
| No of Poles                        |     | 4  |
| No of Leads                        |     | 12   |
| Voltage Regulation ( Steady State) |     | ± %0,5                                       |
| Insulation Class                   |     | H  |
| Degree of Protection               |     | IP 23  |
| Excitation System                  |     | AVR (Automatic Voltage Regulator), Brushless |
| Connection Type                    |     | STAR   |
| Total Harmonic Content (No Load)   |     | < %2   |
| Frequency                          | Hz  | 50   |
| Voltage Output                     | VAC | 230 / 400                                    |
| Rated Power (Standby)              | kVA | 240  |
| Efficiency                         | %   | 93,2   |

|           | W x L x H (mm)     | Weight (kg) | Fuel Tank (lt) | Noise dB(A) |
|-----------|--------------------|-------------|----------------|-------------|
| Canopied  | 1237 x 3919 x 1950 | 2480        | 352            | TBA         |
| Open Skid | 950 x 3000 x 1530  | 1860        | 345            | TBA         |





### Standby Power

Standby power is defined as the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 500 hours of operation per year under average of 70% load. Overloading is not permissible.

### Prime Power

Prime power is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hours.

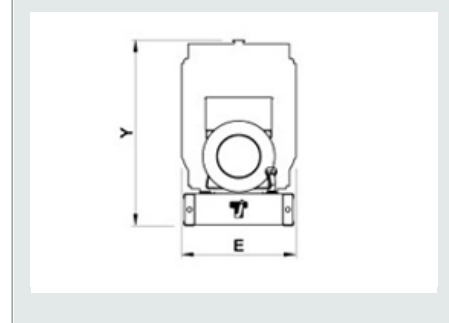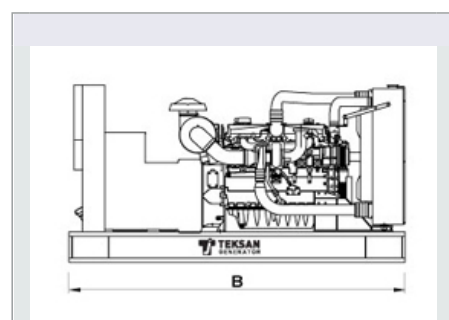

- Technical information and values are according to ISO8528, ISO3046, NEMA MG-1.22, IEC 60034-1, BS 4999-5000, VDE 0530 standards.
- Producing with ISO9001, ISO14001, OHSAS18001, TSE, CE standards.
- All information given in this leaflet is intended for general purposes only. Due to a policy continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sales.

TBA: To Be Ask

TBD: To Be Determined

NA: Not Available

N/A: Not Applicable

TTD232DW5A0510-EN

[www.teksangenerator.com](http://www.teksangenerator.com)

